

A New User Interface for On-Demand Customizable Data Products for Sensors in a SensorWeb

Daniel Mandl¹, Pat Cappelaere², Stuart Frye³, Rob Sohlberg⁴, Vuong Ly¹, Steve Chien⁵, Don Sullivan⁶

¹ NASA/GSFC Greenbelt MD, daniel.j.mandl@nasa.gov

² Vightel Inc. Ellicott City MD

³ SGT Inc. Greenbelt, MD

⁴ University of Maryland, Department of Geography, College Park MD

⁵ NASA/JPL Pasadena CA

⁶ NASA/AMES Moffett Field, CA

Abstract- A SensorWeb is a set of sensors, which can consist of ground, airborne and space-based sensors interoperating in an automated or autonomous collaborative manner. The NASA SensorWeb toolbox, developed at NASA/GSFC in collaboration with NASA/JPL, NASA/Ames and other partners, is a set of software and standards that (1) enables users to create virtual private networks of sensors over open networks; (2) provides the capability to orchestrate their actions; (3) provides the capability to customize the output data products and (4) enables automated delivery of the data products to the users' desktop.

A recent addition to the SensorWeb Toolbox is a new user interface, together with web services co-resident with the sensors, to enable rapid creation, loading and execution of new algorithms for processing sensor data. The web service along with the user interface follows the Open Geospatial Consortium (OGC) standard called Web Coverage Processing Service (WCPS). This presentation will detail the prototype that was built and how the WCPS was tested against a HypSPIRI flight testbed and an elastic computation cloud on the ground with EO-1 data. HypSPIRI is a future NASA decadal mission. The elastic computation cloud stores EO-1 data and runs software similar to Amazon online shopping.

I. INTRODUCTION

This SensorWeb research effort has been ongoing since 2003 with a team comprised of researchers three NASA centers; GSFC, JPL and Ames and the University of Maryland. The vision of the SensorWeb effort is to turn the Earth's sensors into data feeds which can be published over the Internet and can be accessed via subscription to authorized users. Users can create workflows which automatically create higher level data products, such as flood maps, and in turn make them data feeds. Figure 1 shows the overall high level SensorWeb architecture. The components outlined in red are the main categories of SensorWeb components. The Web Coverage Processing Service (WCPS) is outlined in a heavy red line and is the subject of this paper.

At the last ESTF in June 2010, a paper [1] was presented on the initial formulation efforts for the development of WCPS interfaces. At that time, some preliminary concepts were presented along with some benchmarks for performance of a WCPS in a HypSPIRI testbed environment using EO-1 algorithms and EO-1 data to simulate HypSPIRI data and the algorithms that would be used for that mission in the future.

An actual WCPS interface had not been developed. At the writing of this paper, we have developed an actual WCPS that is running in our elastic compute cloud and on our HypSPIRI testbed, both of which will be described later in the paper.

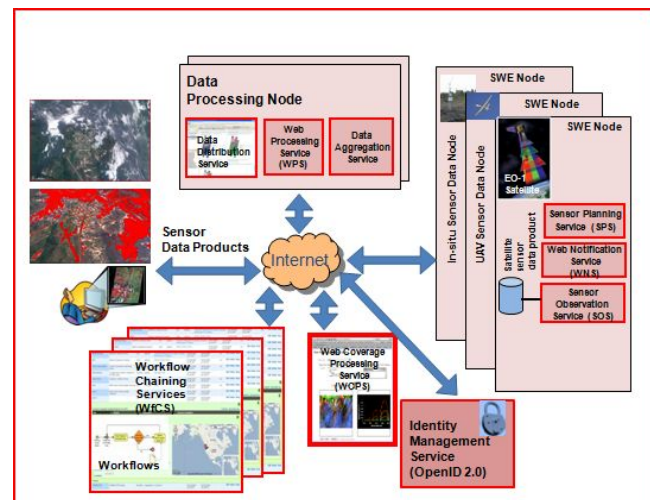


Figure 1 High level SensorWeb architecture with key components outlined in red and WCPS outlined in a heavy red line

II. TARGET MISSION ENVIRONMENT FOR WCPS

Traditional flight software uploads tend to be complex and usually require software developers and operators. The vision of WCPS as part of the SensorWeb Toolbox is to transform this software upload process to a user-driven self-service process. This is accomplished by separating the critical onboard functions from the science applications that run onboard and then to firewall the two processes. For example, on Earth Observing 1 (EO-1), there are two flight computers. One computer runs the Command and Data Handling (C&DH) applications. In particular, the data handling portion refers to telemetry. The other flight computer handles the science recorder and any functions which have to do with science processing and onboard scheduling of images. There is also bridge software which allows the two computers to communicate so that the scheduling software can task the C&DH system. EO-1 has rudimentary capability to upload

new science processing algorithms. But it is not user-driven and more like the traditional flight software upload process.

This architectural concept is extended into the future operations concept for the HypsIRI NASA Decadal mission via the Intelligent Payload Module (IPM). HypsIRI is presently scheduled to launch after 2020 versus the original target launch date in 2014. The insertion of the IPM into the HypsIRI mission concept, is to allow for a second onboard processor which will be separate from the C&DH computer, to service low latency users. Figure 2 shows the Computer Aided Design (CAD) generated picture of the HypsIRI satellite as it is presently conceived.



Figure 2 Picture of satellite as it is presently conceived

Figure 3 depicts the general architecture of the IPM. In addition to a high speed onboard processor, the IPM contains a Direct Broadcast antenna and electronics to allow rapid downlink of subsets of instrument data or higher level data products that would be processed onboard from the subset of data. The IPM will tap off of two instrument data streams that are on the satellite, the Visible through ShortWave InfraRed (VSWIR) imaging spectrometer and Thermal Infrared (TIR) scanner.

Note that the composite data rate of the two instruments is over 900 Mbps. Therefore the CPU for the IPM has to be very fast in order to tap off of this fire hose of data and to be able to process the data into higher level products. In order to have any chance to keep up with the data and produce the data products in a timely manner onboard, the team has been examining the use of multi-core and multi-tiled CPU architectures. Furthermore, the other question that the team is trying to answer is how to interface the WCPS to such a parallel processing environment.

Although this effort is mainly targeted for the HypsIRI mission, many of the future NASA Decadal Survey missions have a similar profile of high speed and high volume instrument data. There is a desire to provide data to low latency users such as government agencies and Non-governmental Organizations (NGO) that deal with disasters. Therefore, the IPM concept, along with the corresponding

WCPS software would help to fill that need.

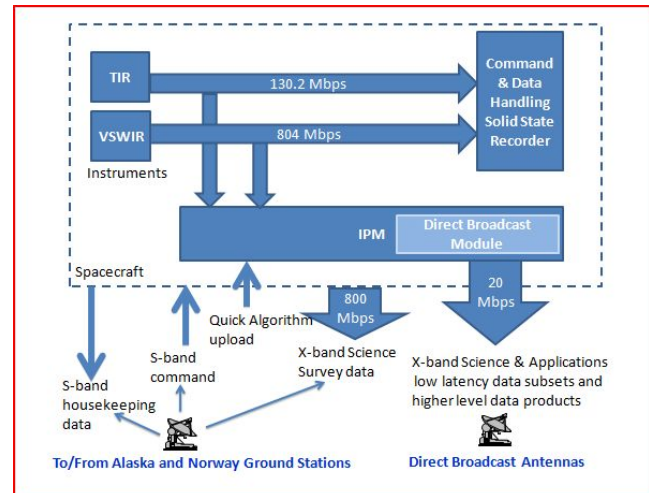


Figure3 Architecture of the IPM to be used for HypsIRI Decadal mission and possibly other NASA Decadal missions.

III. WCPS OPERATIONS CONCEPT

Figure 4 shows a typical data flow for the use of a WCPS. Note that in this diagram, the Weka data mining tool is used to generate a desired algorithm. The custom data product pictured in the diagram is a flood extent classifier used over the country of Namibia. The satellite images used are from the Advanced Land Imager on EO-1. The output of the Weka tool is input into the Weka to WCPS translator which is another piece of software from the SensorWeb Toolbox. The output of the Weka to WCPS translator is the input into the WCPS client. The WCPS client is the user interface that is used to design the algorithm and upload the final results into a buffer of available algorithms. The output of the WCPS client is called a "parse tree" which is the instruction set that specifies to the target environment how to process the target data set from the instrument. The WCPS Runtime (WCPS-R) is used by the user to execute the algorithm against the specific data set specified by the user. This can be a data stream from an instrument when the WCPS-R is used in a satellite environment, or it can be one image of a stored data set when used on the ground. For example, when the WCPS-R is used in the elastic cloud environment which stores EO-1 data, the user is queried for the algorithm desired and the EO-1 scene ID that is desired.

Figure 4 is a generalized operations concept for the use of WCPS to generate an algorithm and to inject that algorithm into one of three environments; (1) satellite, (2) airborne vehicle such as an unmanned aerial system and (3) an elastic compute cloud on the ground. Note that in the case shown, the output product is in KMZ format and is put onto a Google Map which resides in the elastic compute cloud. The SensorWeb software component that ingests the flood extent classified image is the Flood Dashboard. The vision for our future process for flood extent images is that once the algorithm is

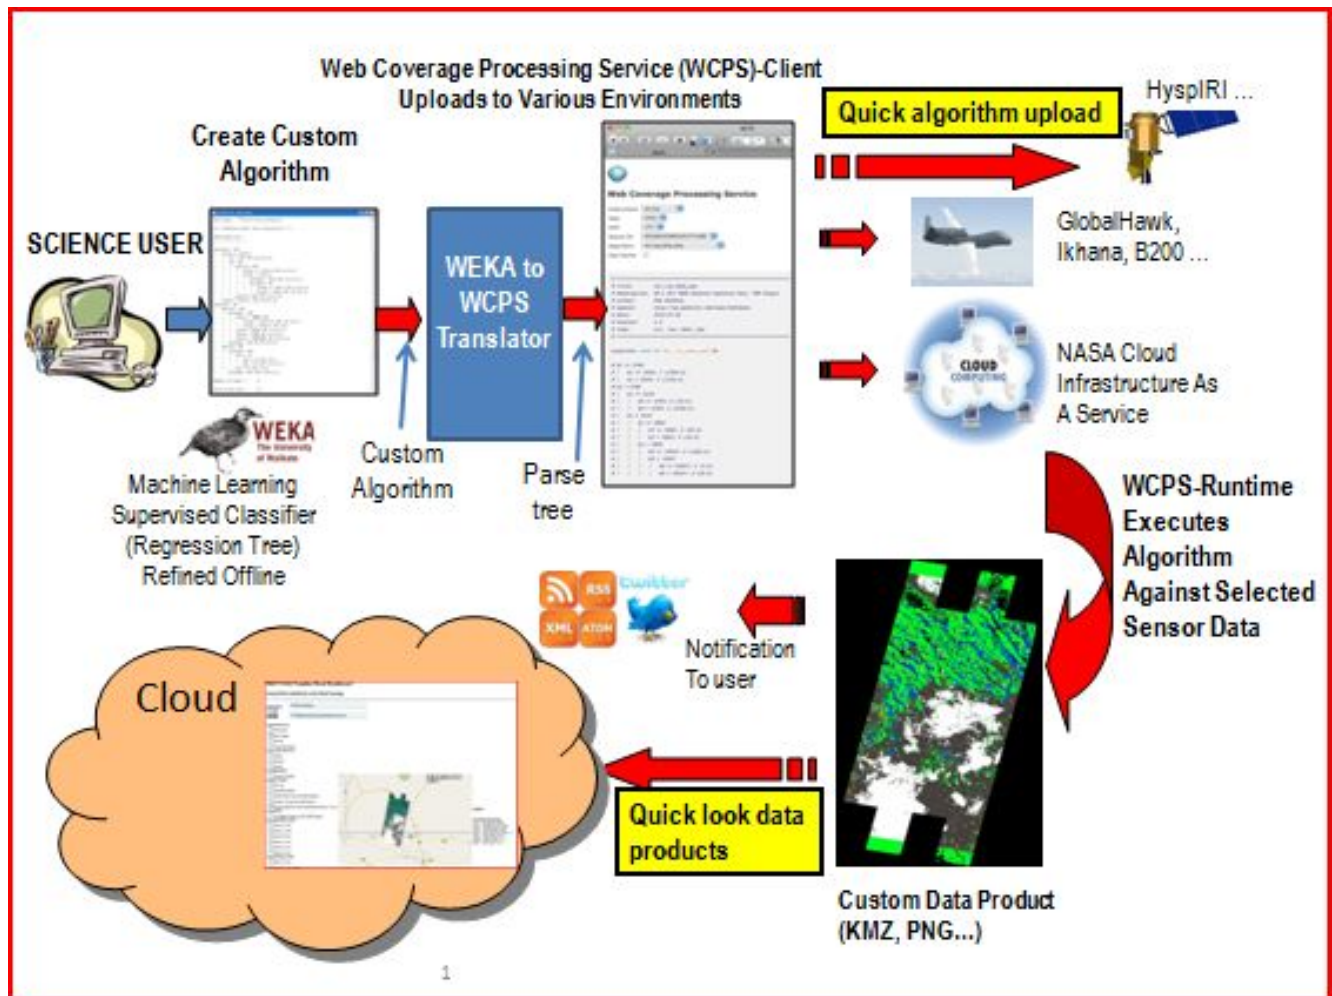


Figure 4 Top level operations concepts for WCPS in which a ground based WCPS client is used to design a algorithm and then the algorithm is uploaded to one of three environments. The user selects one of the created algorithms to run via the WCPS-R which causes the quick look data product to be produced and sent to the elastic compute cloud.

created and made available, a corresponding workflow would automatically run the algorithm and place the flood extent on the Flood Dashboard to be displayed in Google Map whenever an image of a flooded region was taken by EO-1.

The extended operations concept for the WCPS will be to make use of a Workflow Chaining Service (WfCS), as depicted in figure 1, to orchestrate the use of the WCPS. For example, one WfCS used in the SensorWeb Toolbox is GeoBPMS. It is used to task EO-1 and to control data processing and delivery. GeoBPMS has an entry field for theme. So if a user specifies that the image has a flood theme, GeoBPMS would specify the use of a flood classifier for data processing via the WCPS-R. Then a notification would be sent to the user to let them know that their flood classified image, along with the raw data, is available on the cloud.

Figure 5 shows a sample image from the EO-1 ALI

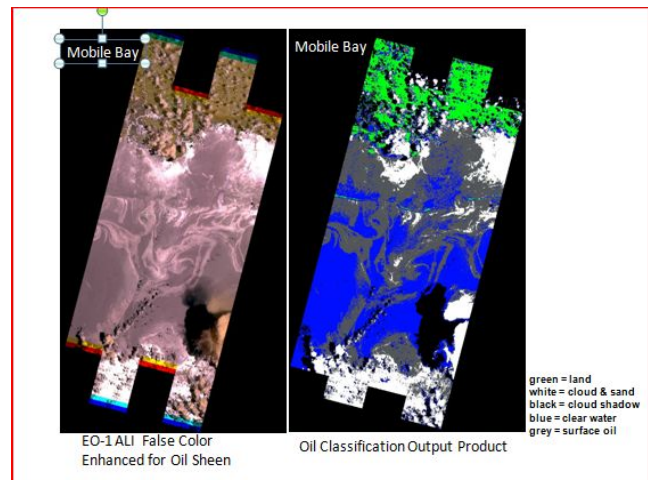


Figure 5 Sample EO-1 ALI image as input on left and classified with WCPS created algorithm for oil on water on right. The image is Mobile Bay in Louisiana

that was used to detect the oil spills in the Gulf of Mexico and created via the WCPS. The left panel is the input data and the right panel is the algorithm processed image.

Figure 6 depicts the present WCPS user interface that resides on the Geobliti on another cloud. It allows users to exercise the WCPS-C locally and to access the WCPS-R remotely.

Figure 6 User interface for access to WCPS-C and WCPS-R

IV. WCPS AND CONCURRENT PROCESSING

As previously mentioned, the key to successfully implementing WCPS will be the ability to specify algorithms and then to run them on a concurrent architecture. This means the WCPS might have to specify how an algorithm can be broken up so that different parts can be run on different cores or tiles in parallel and thus increase the throughput performance. Figure 7 depicts an example in which a pan sharpening algorithm is specified and each of the three bands is allocated to different cores or tiles.

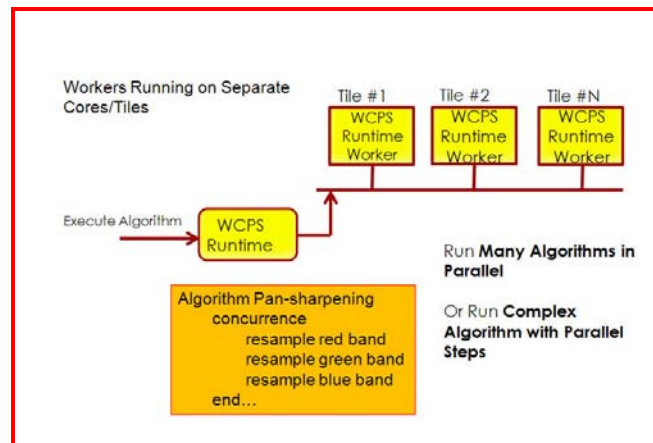


Figure 7 WCPS specified pan sharpened algorithm specified to run concurrently

The initial experiments are being done on the elastic compute cloud since it has over 300 cores. This is the easier task because it totally resides on the ground and more tools exist to control the parallel processing for ground systems than multi-core flight computers. In parallel, team members are devising methods to make use of the multiple cores on the HypIRI flight testbed. Initial performance benchmarks were measured using the SpaceCube processors with EO-1 algorithms. These benchmarks will be used to compare the increase in performance as the parallel processing is integrated.

V. TESTING THE WCPS OPS CON WITH AN AIRBORNE MISSION

Since HypIRI launch is far off into the future at this time, the team has been in discussions with ER-2 personnel and with Global Hawk personnel to possibly fly a WCPS configuration. A multicore processor would be put into a box and mounted

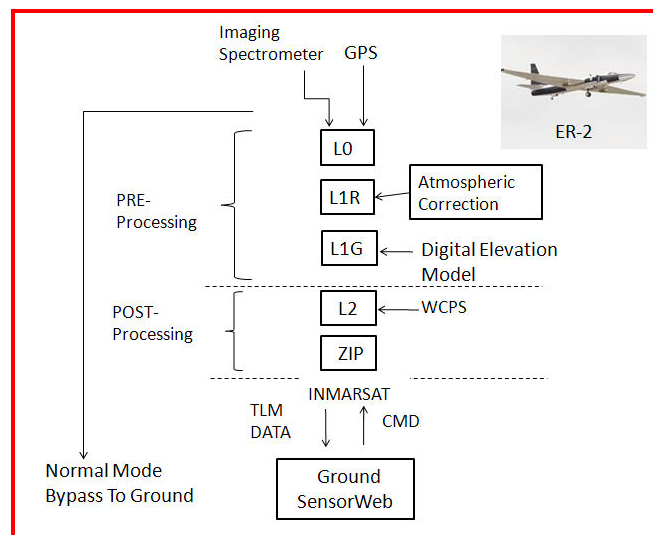


Figure 8 Possible ER-2 WCPS configuration for future test


into an ER-2 or Global Hawk with an instrument that is similar to that of HypsIRI. Figure 8 depicts the desired configuration of the IPM and the communications links that would be used to emulate the HypsIRI IPM operations concept. This would include an embedded WCPS. One possible mission being considered is the Enhanced MODIS Airborne Simulator (EMAS) mission which will be flown in summer 2012. The team is negotiating possibly flying in one of the engineering flights after the initial mission flight.

VII. CONCLUSION: EVOLUTION TO CLOUD COMPUTING

The WCPS concept increases user access and provides more flexibility for creating data products for sensor data. The WCPS paired with cloud computing and onboard parallel processing provides the next evolutionary step in data processing from the user perspective.

REFERENCES

- [1] Mandl, D; P. Cappelaere; S. Frye; R. Sohlberg; V. Ly; S. Chien; D. Tran; A. Davies; D. Sullivan; T. Ames; K. Witt; J. Stanley, "SensorWeb 3G: Extending On-Orbit Sensor Capabilities to Enable Near Realtime User Configurability", ESTF 2010, June 2010.
- [2] <http://hyspiri.jpl.nasa.gov>
- [3] <http://sensorweb.nasa.gov>
- [4] <http://eo1.gsfc.nasa.gov>




A New User Interface for On-Demand Customizable Data Products for Sensors in a SensorWeb

***Dan Mandl
NASA/GSFC
Software Engineering Division
June 21, 2011***



Team



Daniel Mandl - GSFC (lead)

Steve Chien – JPL

Rob Sohlberg – Univ. of Maryland

Pat Cappelaere – Vightel

Stu Frye – SGT


Danny Tran – JPL

Vuong Ly – GSFC

Matt Handy – GSFC

Don Sullivan – Ames





Linda Derezinski – Innovative Solution





Overview

- A SensorWeb is a set of sensors (land, marine, air, space) and processing that interoperate in an automated collaborative manner.
- The SensorWeb Toolbox is a set of software modules that have been created to enable users to create various SensorWebs
- The Web Coverage Processing Service (WCPS) is one of the components created in the SensorWeb Toolbox which is the subject of this presentation
 - WCPS enables a user to rapidly define an algorithm which can then be uploaded and run within a sensor system
 - WCPS shown in next diagram relative to other SensorWeb components


SensorWeb Reference Architecture

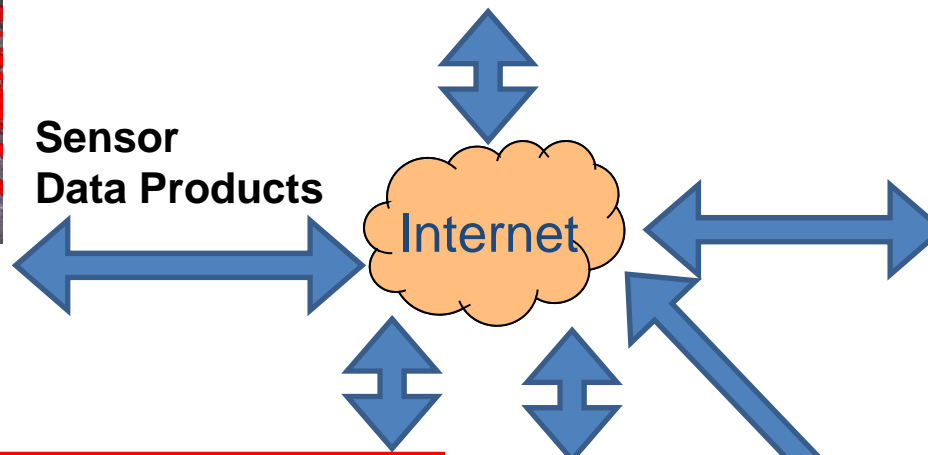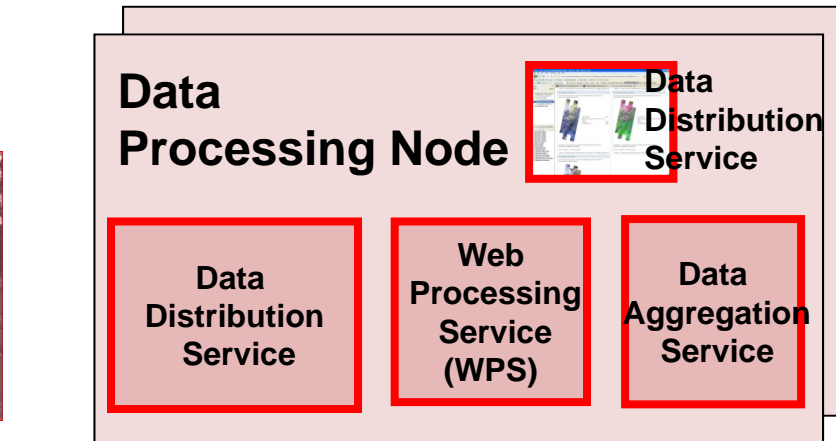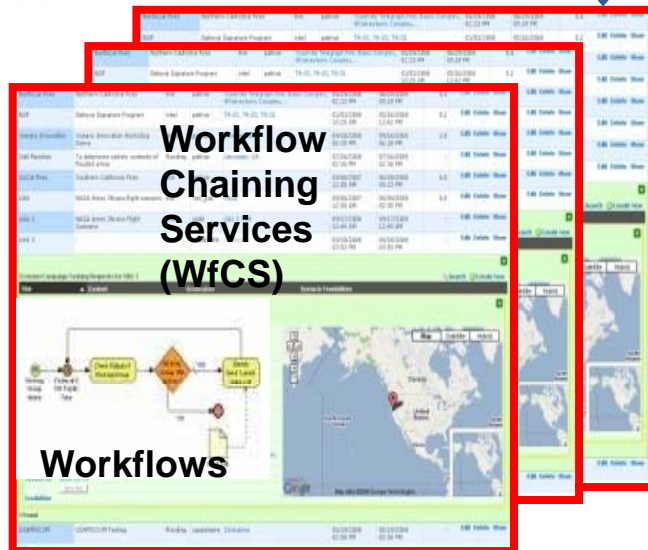


Sensor Data Products

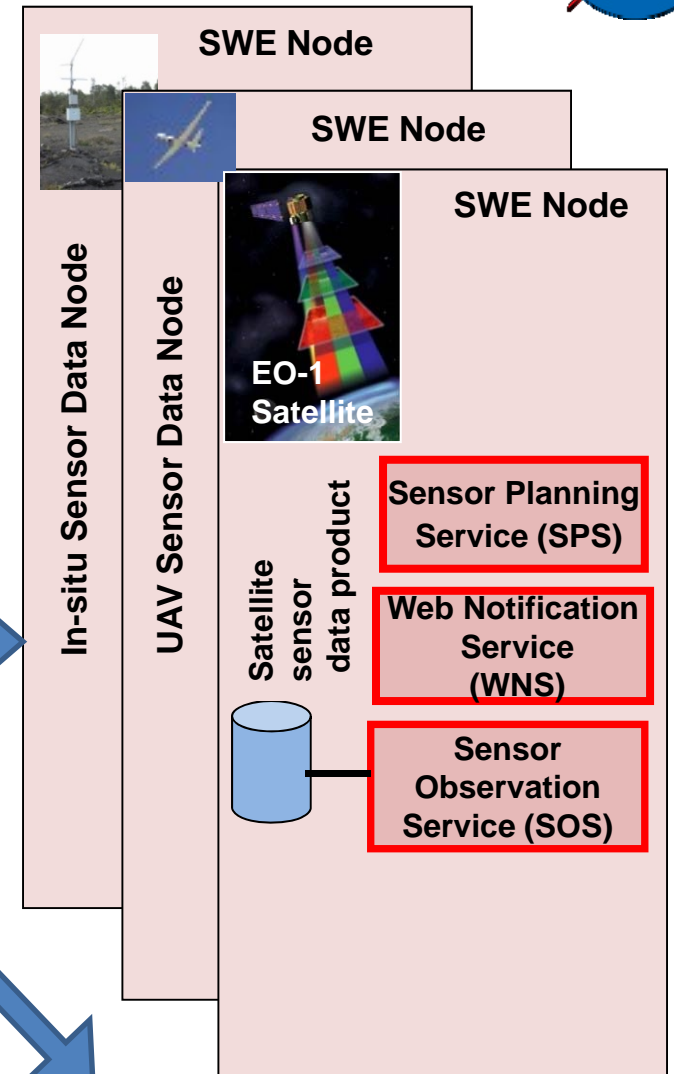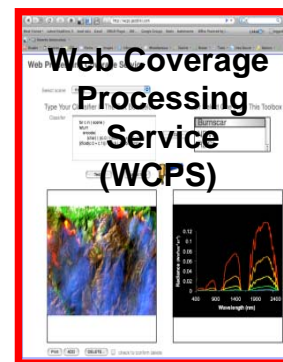

NASA Decadal Survey HypsIRI



Architecture of Intelligent Payload Module to be Used for HypIRI

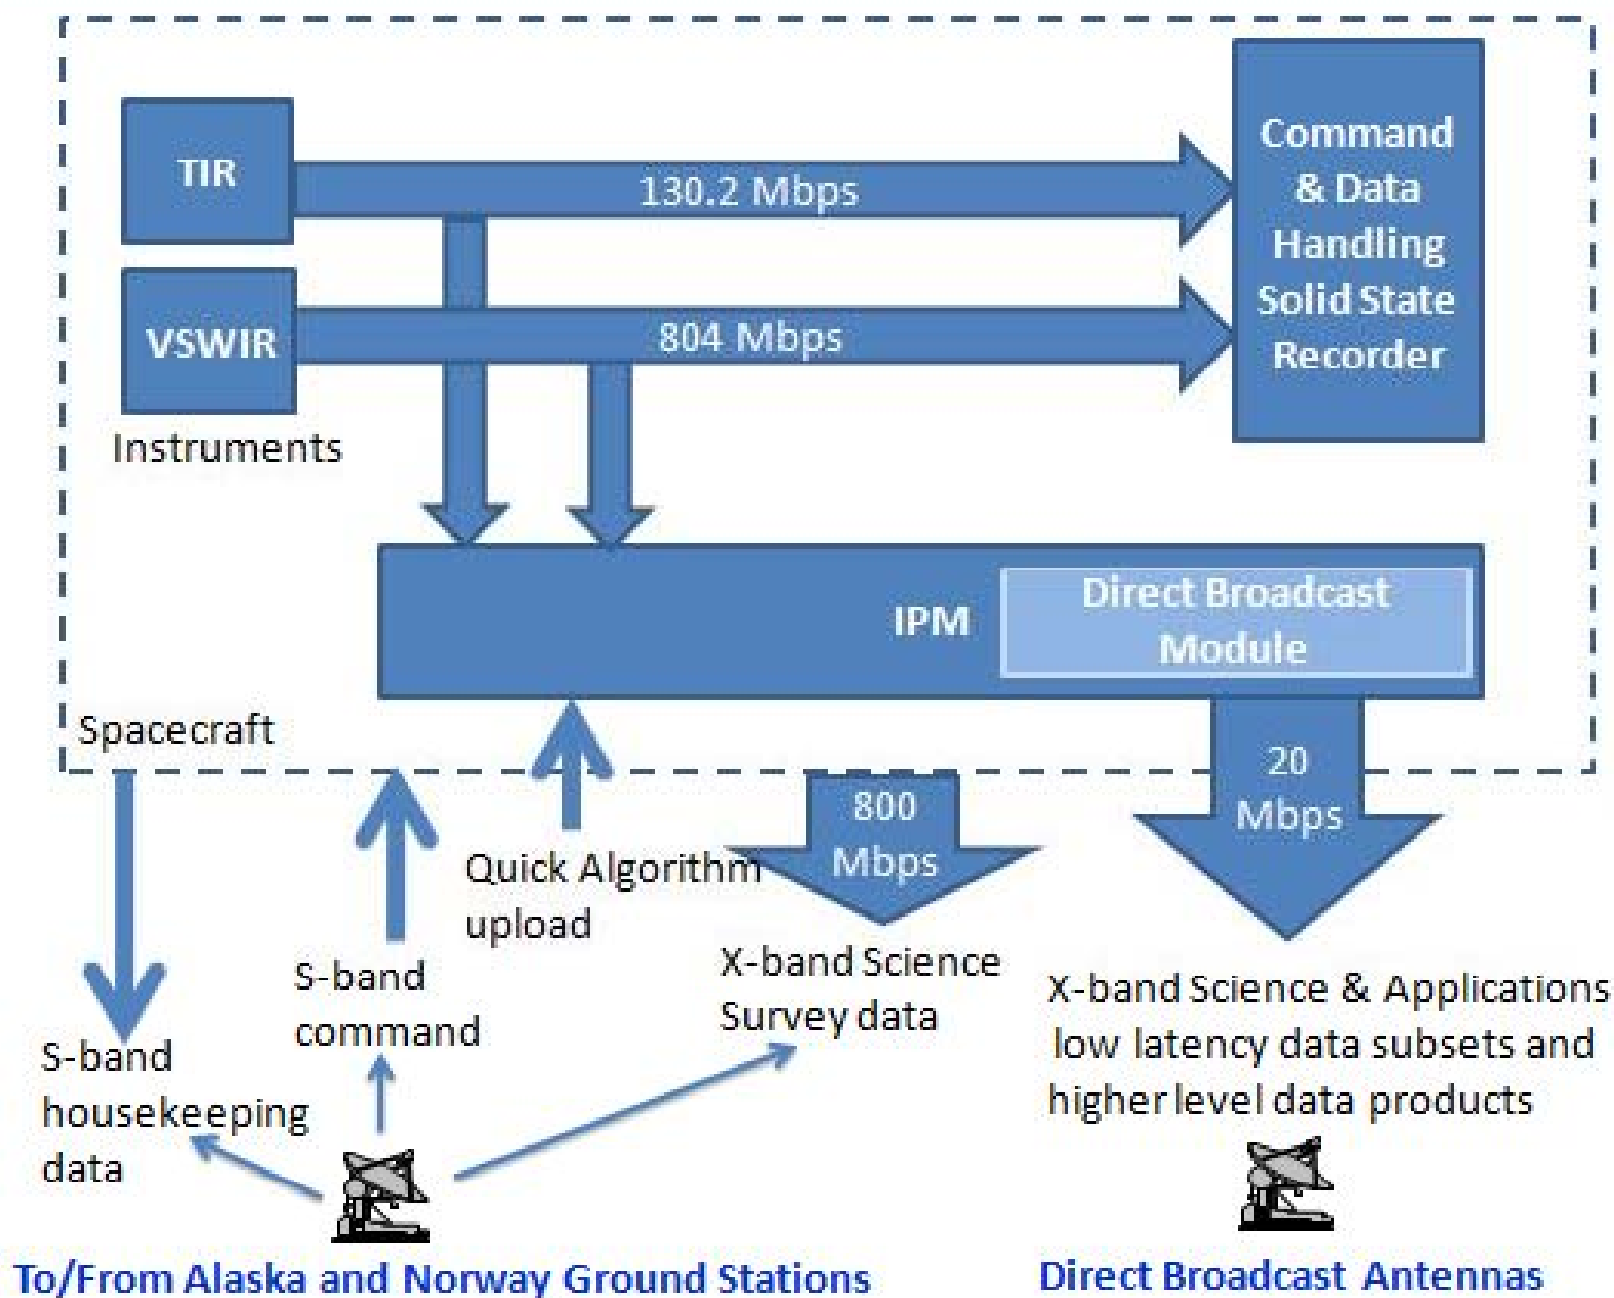


WCPS Quick Load/Quick Look Ops Con



Web Coverage Processing Service (WCPS)-Client
Uploads to Various Environments

Create Custom
Algorithm

SCIENCE
USER




WEKA
The University
of Waikato

Machine Learning
Supervised Classifier
(Regression Tree)
Refined Offline

Custom
Algorithm


**WEKA to
WCPS
Translator**

Parse
tree

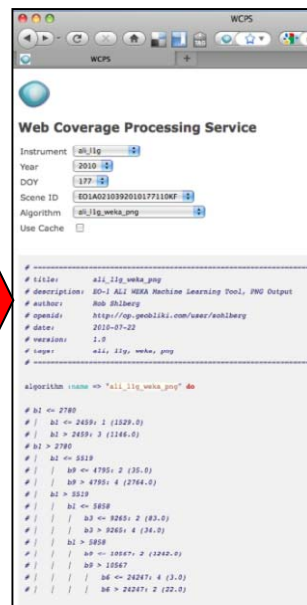

Quick algorithm upload

HyspIRI



GlobalHawk,
Ikhana, ER-2 ...




NASA Cloud
Infrastructure As
A Service




WCPS-Runtime
Executes
Algorithm
Against
Selected Sensor
Data

Cloud

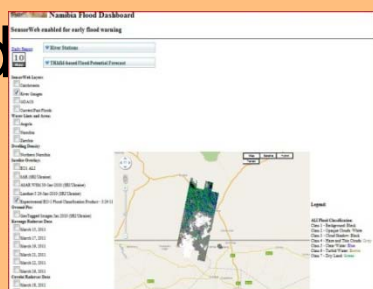




Notification
to user

**Quick look data
products**

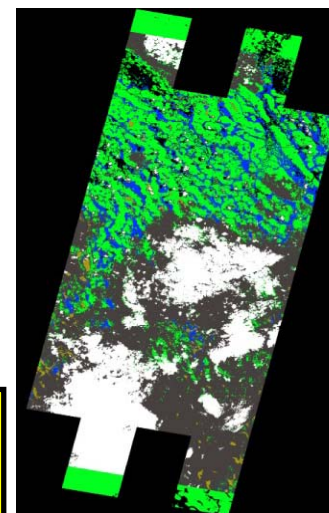


Custom Data
Product
(KMZ, PNG...)

Example of WCPS Product

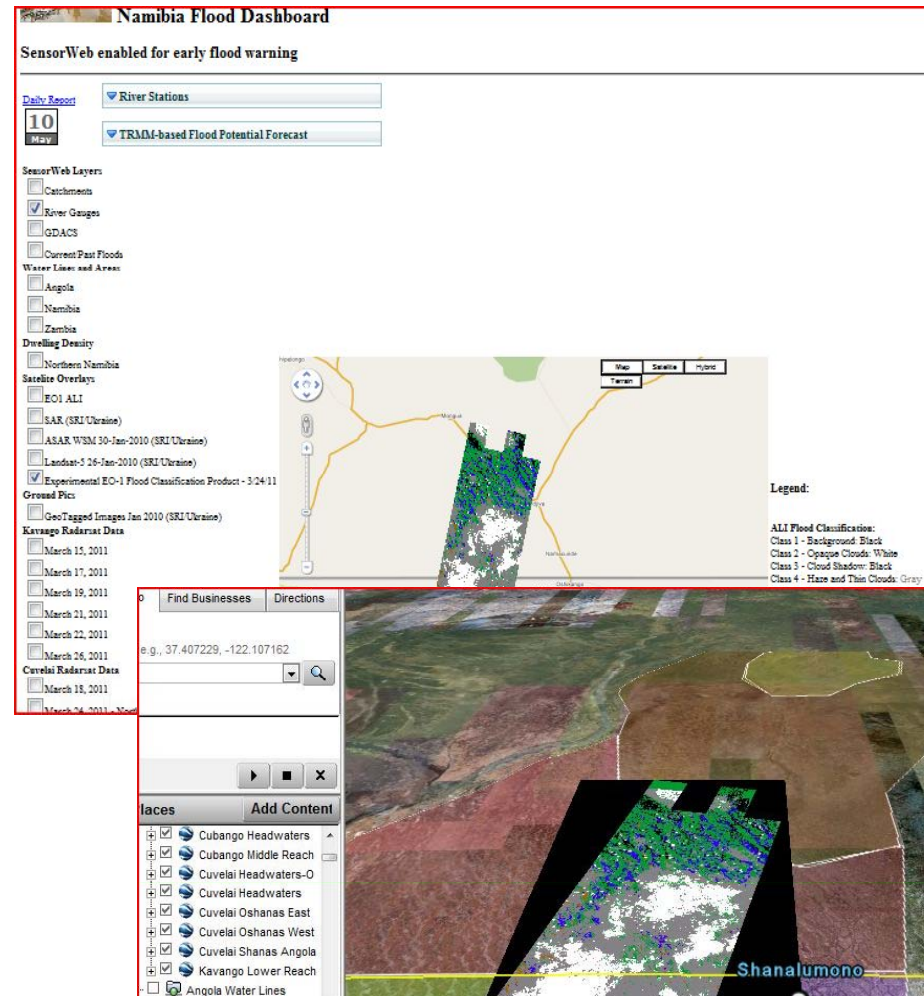
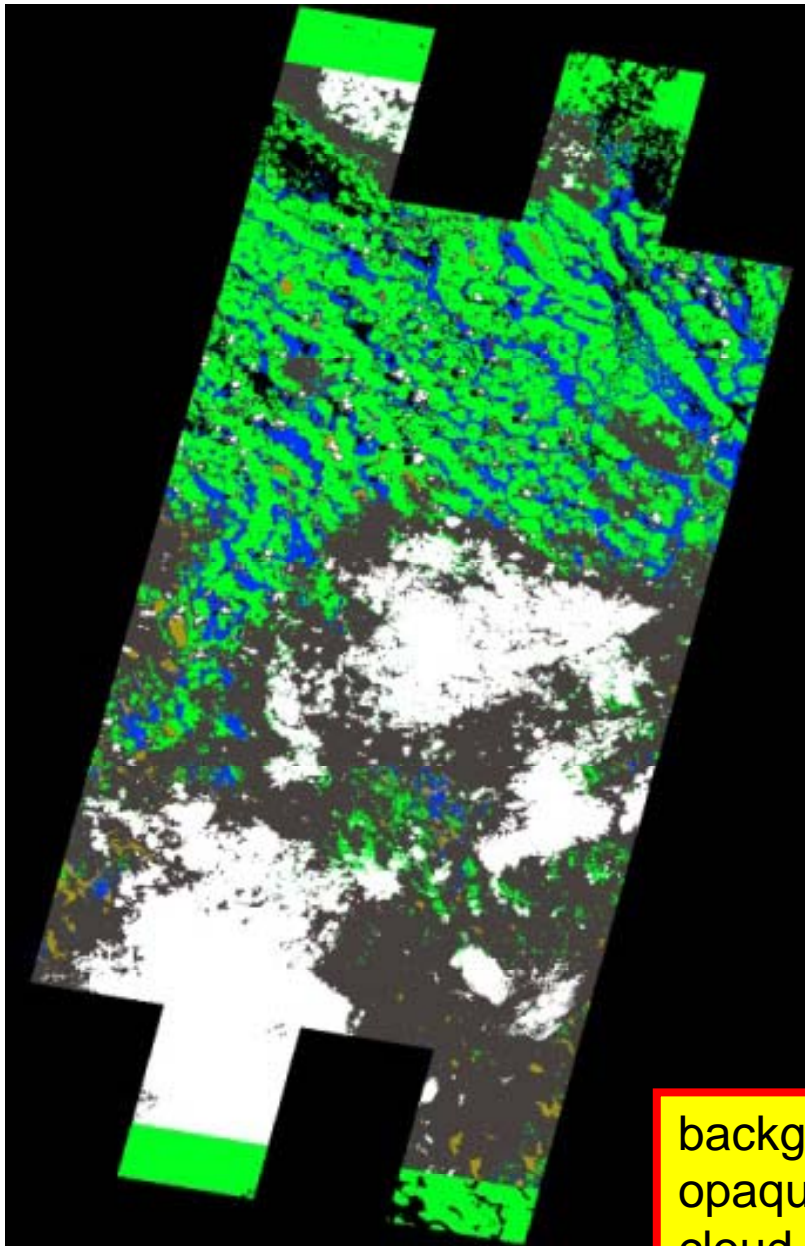



background = black
opaque clouds = white
cloud shadow = black
haze and thin clouds = grey
clear water = blue
turbid water = brown
dry land = green

**Flood Classification using
WEKA tool and WCPS for
Oshanas area in Namibia
3-24-11**

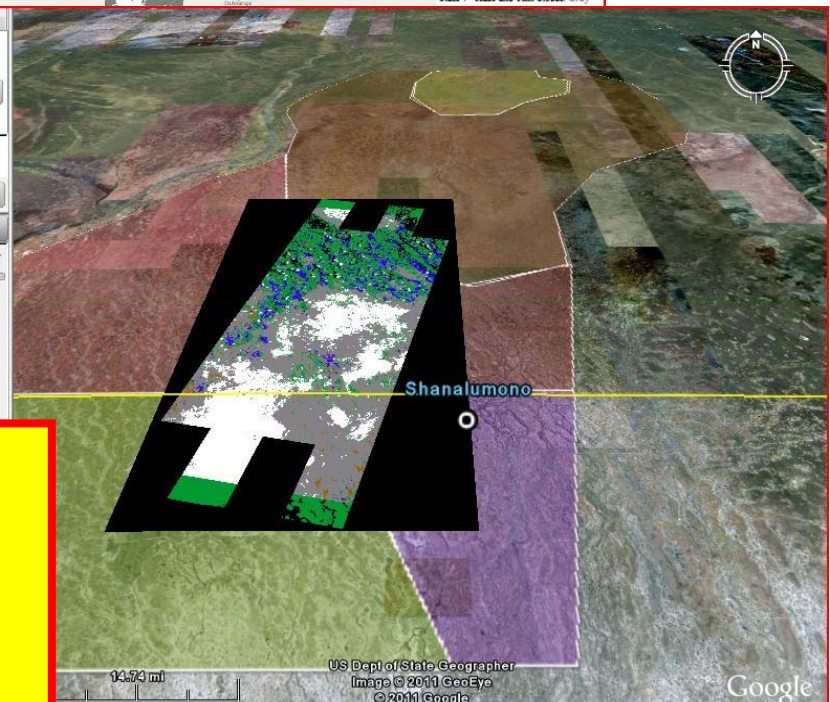



Another Example of WCPS Product

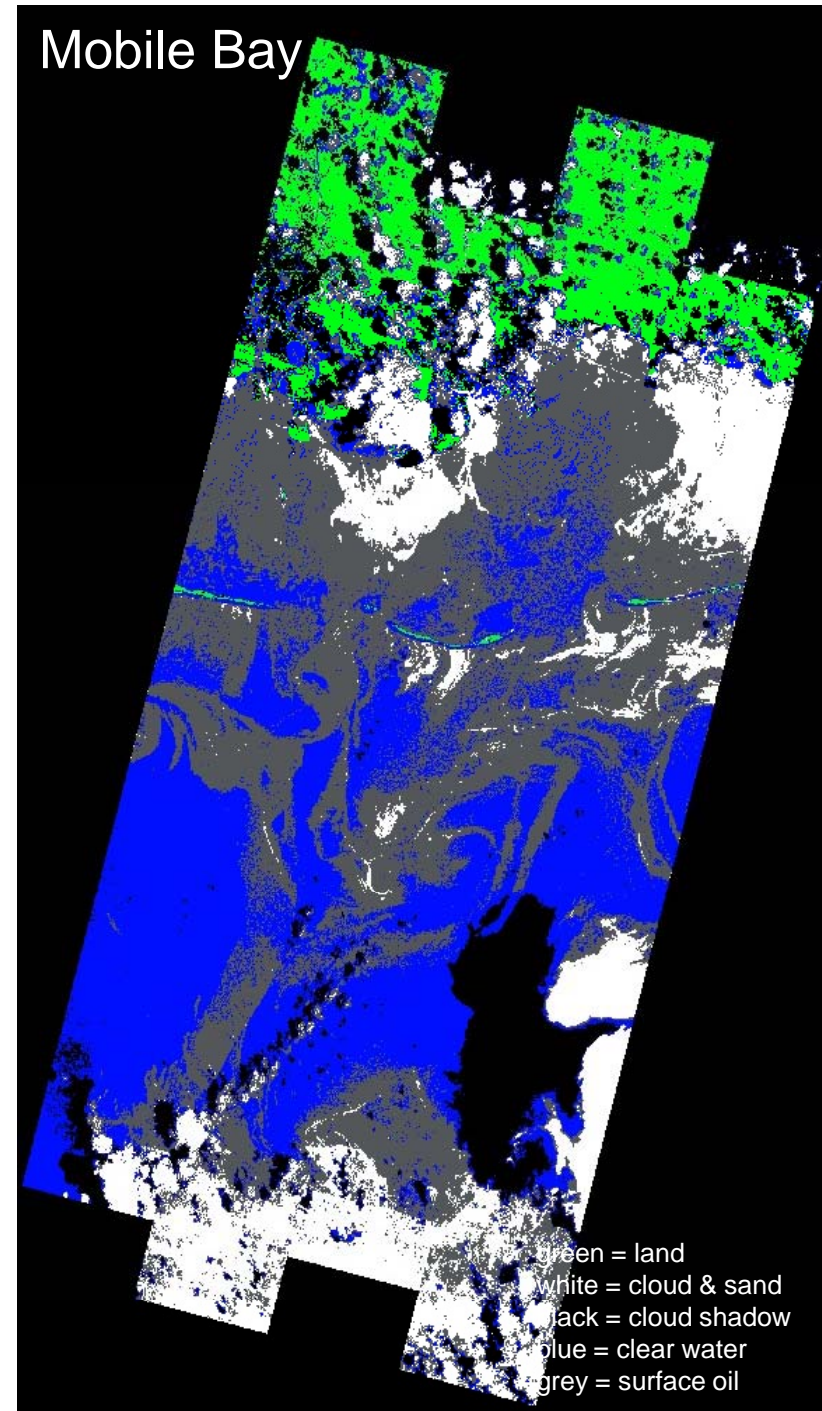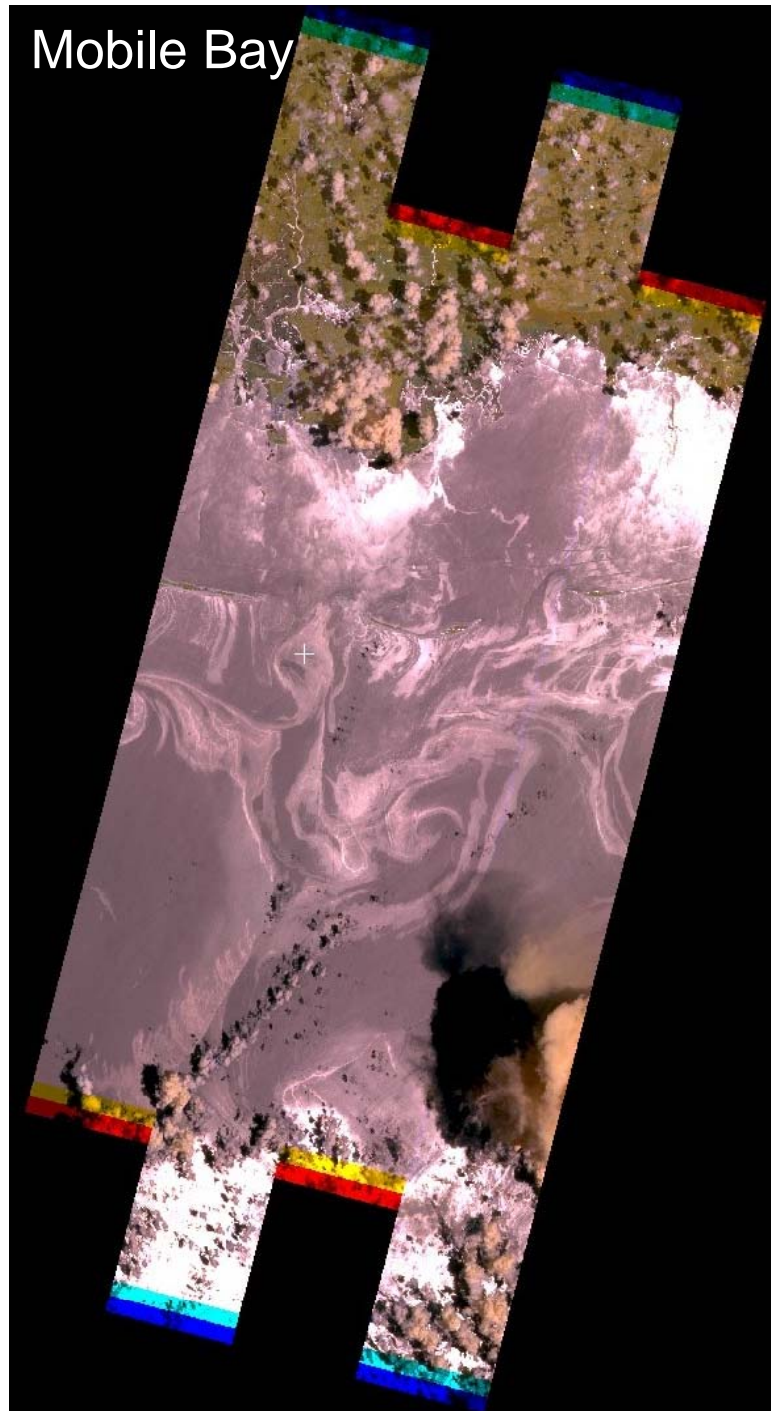



EO-1 ALI False Color Enhanced for Oil Sheen

Oil Classification Output Product

WCPS Flight Testbed Ops Con (Summer 2011)

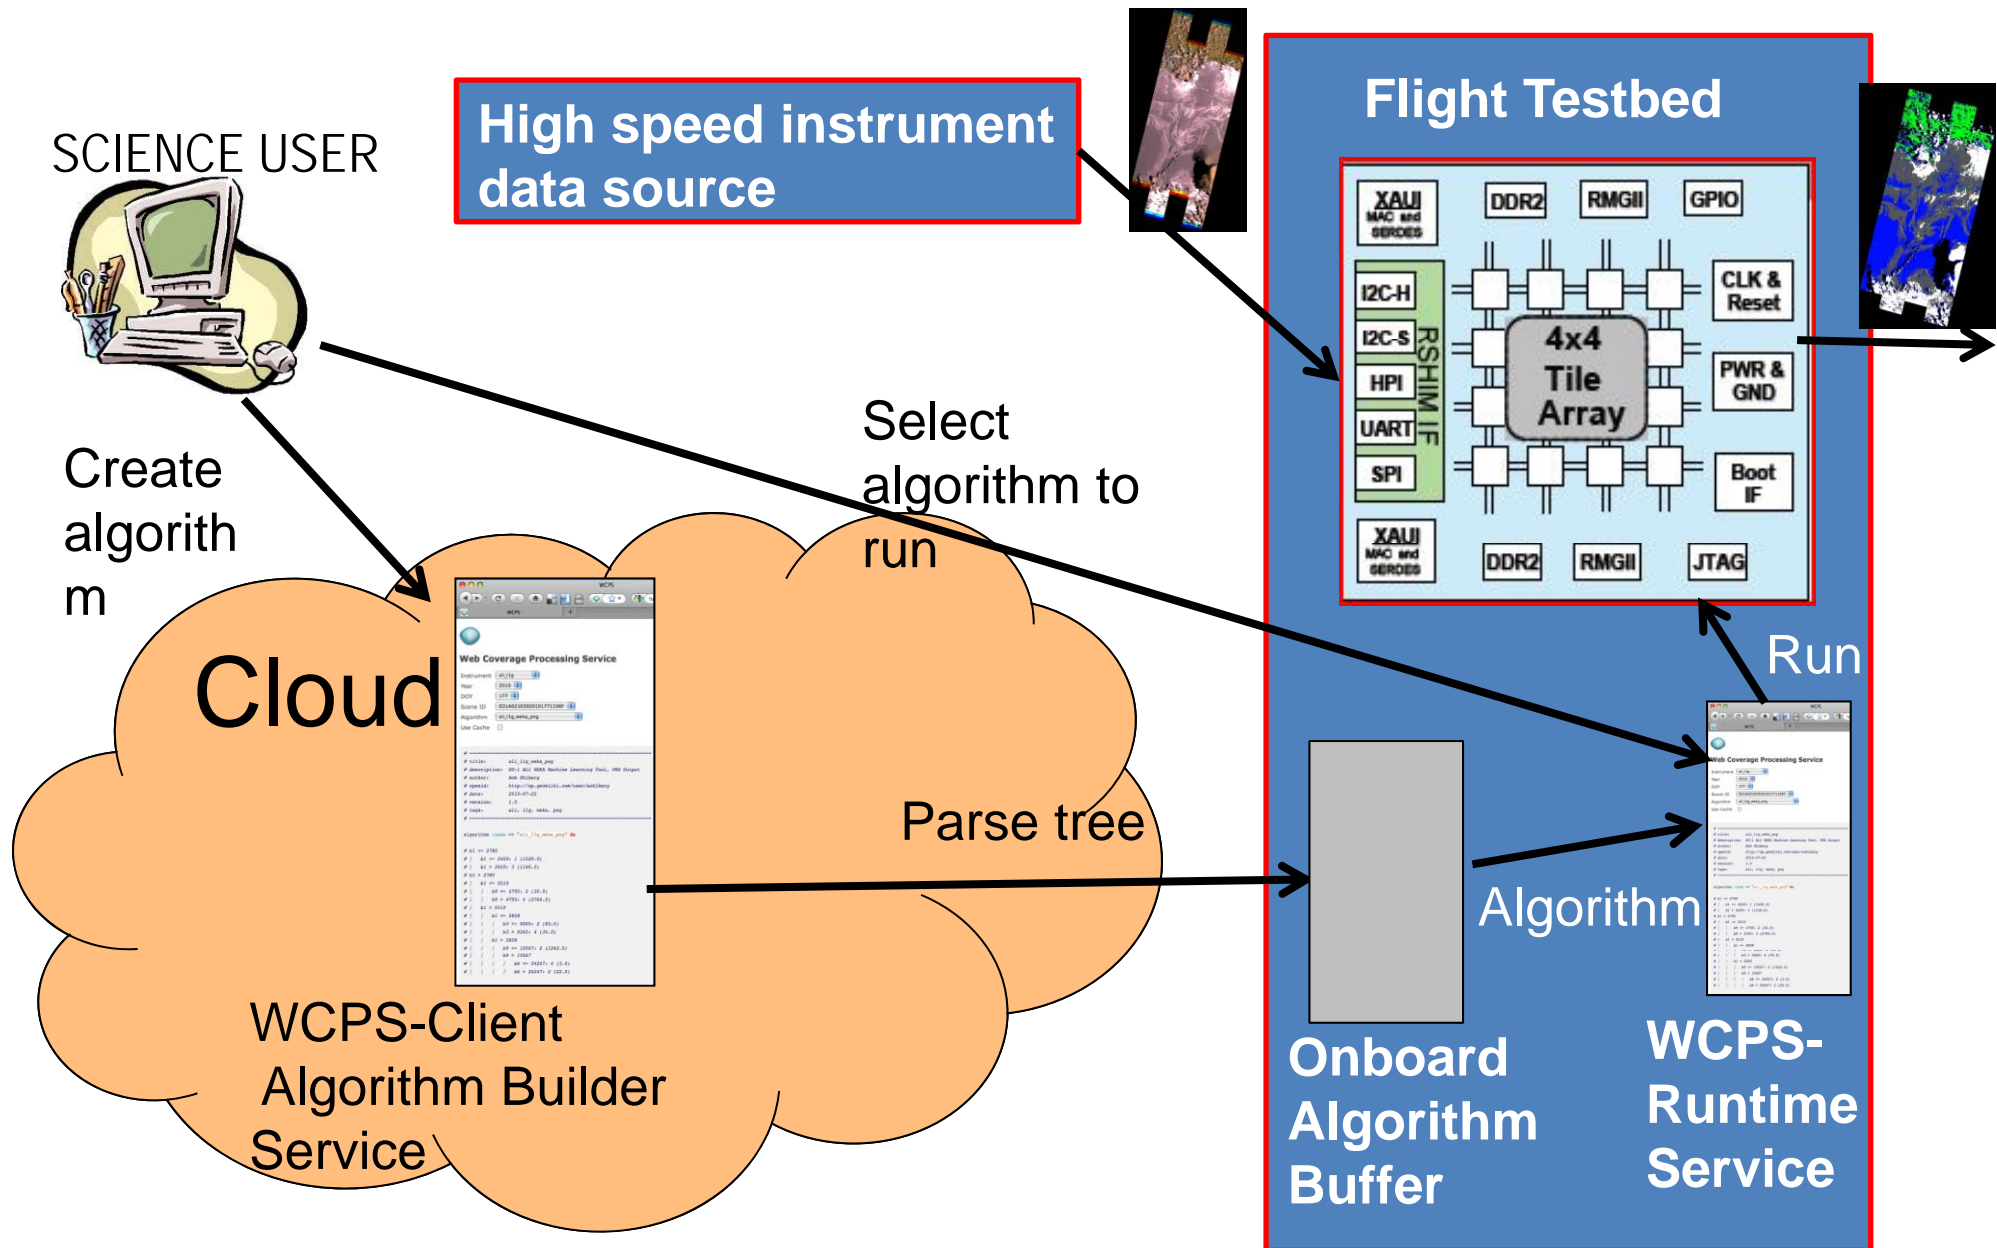

User Interface for Access to WCPS-Client and WCPS-Runtime

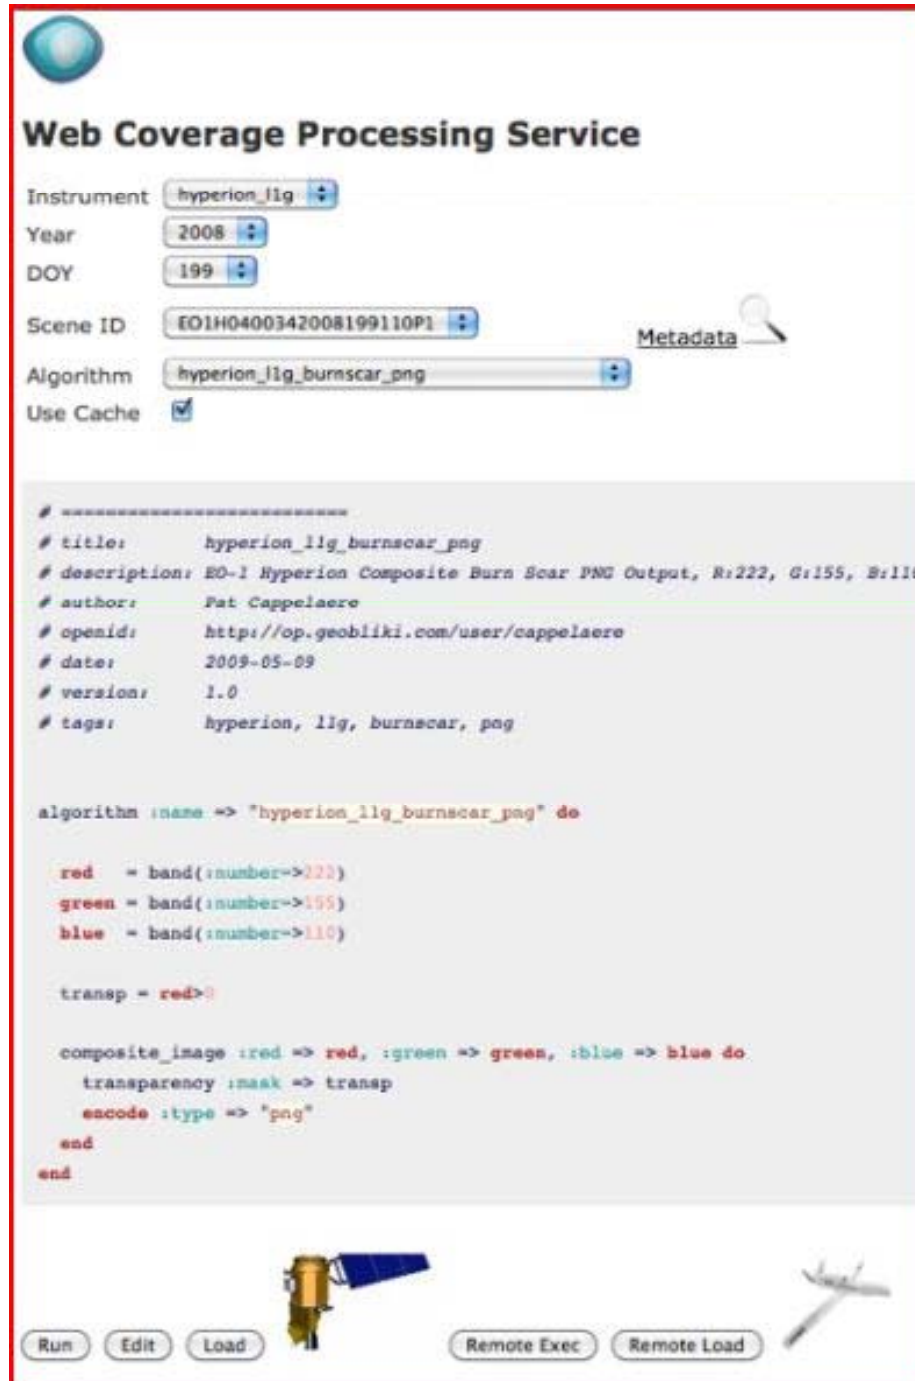

The image shows a web application titled "Web Coverage Processing Service". It features a header with a globe icon. Below the header, there are several input fields for configuration: "Instrument" (hyperion_l1g), "Year" (2008), "DOY" (199), "Scene ID" (EO1H0400342008199110P1), "Algorithm" (hyperion_l1g_burnscar_png), and a "Use Cache" checkbox which is checked. A "Metadata" link with a magnifying glass icon is also present. Below these fields is a large text area containing a metadata block and a code block. The metadata block includes fields like title, description, author, openid, date, version, and tags. The code block contains a script for processing the data. At the bottom of the interface, there are icons for a satellite and a satellite dish, and buttons for "Run", "Edit", "Load", "Remote Exec", and "Remote Load".

Web Coverage Processing Service

Instrument:

Year:

DOY:

Scene ID:

Algorithm:

Use Cache: ☒


[Metadata](#)

```
# =====  
# title:      hyperion_l1g_burnscar_png  
# description: EO-1 Hyperion Composite Burn Scar PNG Output, R:222, G:155, B:110  
# author:     Pat Cappelaere  
# openid:     http://op.geobliki.com/user/cappelaere  
# date:       2009-05-09  
# version:    1.0  
# tags:       hyperion, l1g, burnscar, png  
  
algorithm :name => "hyperion_l1g_burnscar_png" do  
  
  red = band(:number=>222)  
  green = band(:number=>155)  
  blue = band(:number=>110)  
  
  transp = red>0  
  
  composite_image :red => red, :green => green, :blue => blue do  
    transparency :mask => transp  
    encode :type => "png"  
  end  
end
```


Sample Concurrent Processing for Web Coverage Processing Service (WCPS)



Workers Running on separate
Cores/Tiles

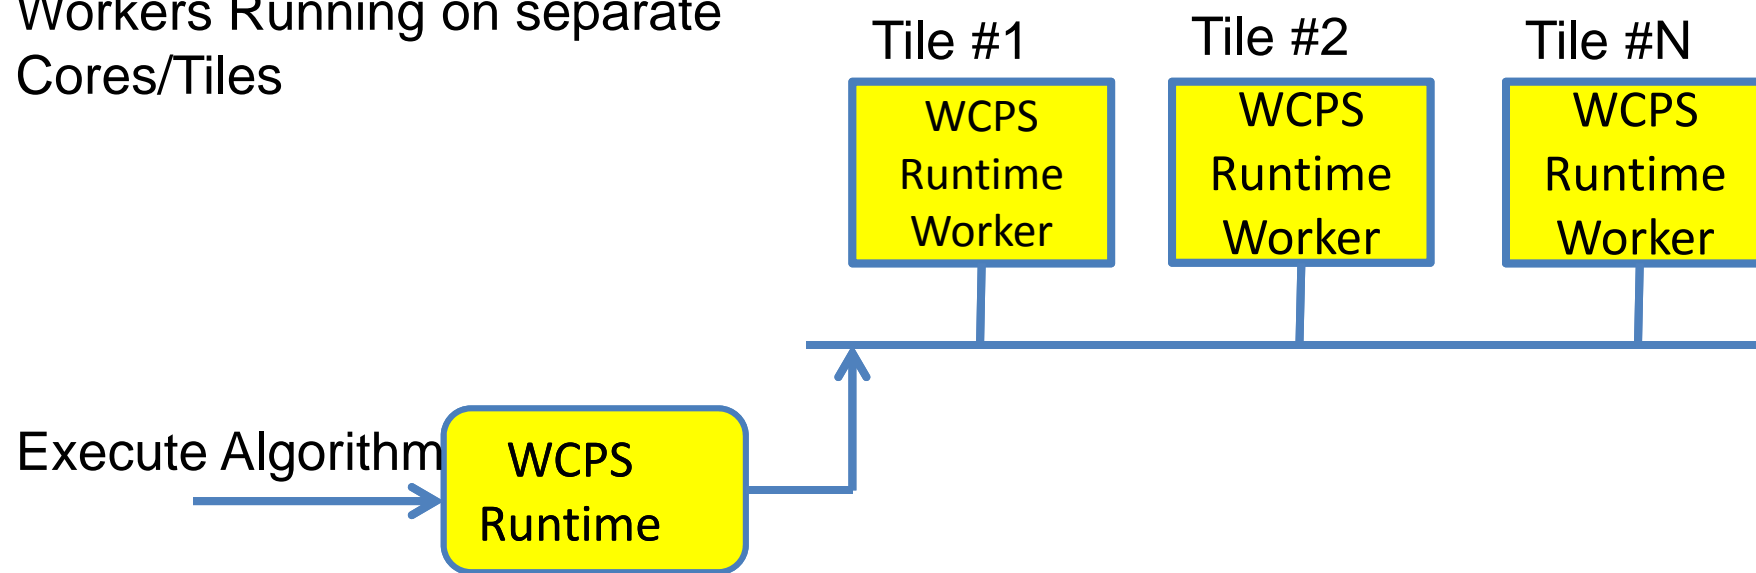

Algorithm Pan-sharpening
concurrency

resample red band
resample green band
resample blue band

end...

Pursuing Flight Opportunity To Test Operations Concept




Phase 1:

- eMAS on ER-2 (Summer/Fall 2012)

Phase 2:

- eMAS on Global Hawk (2013)

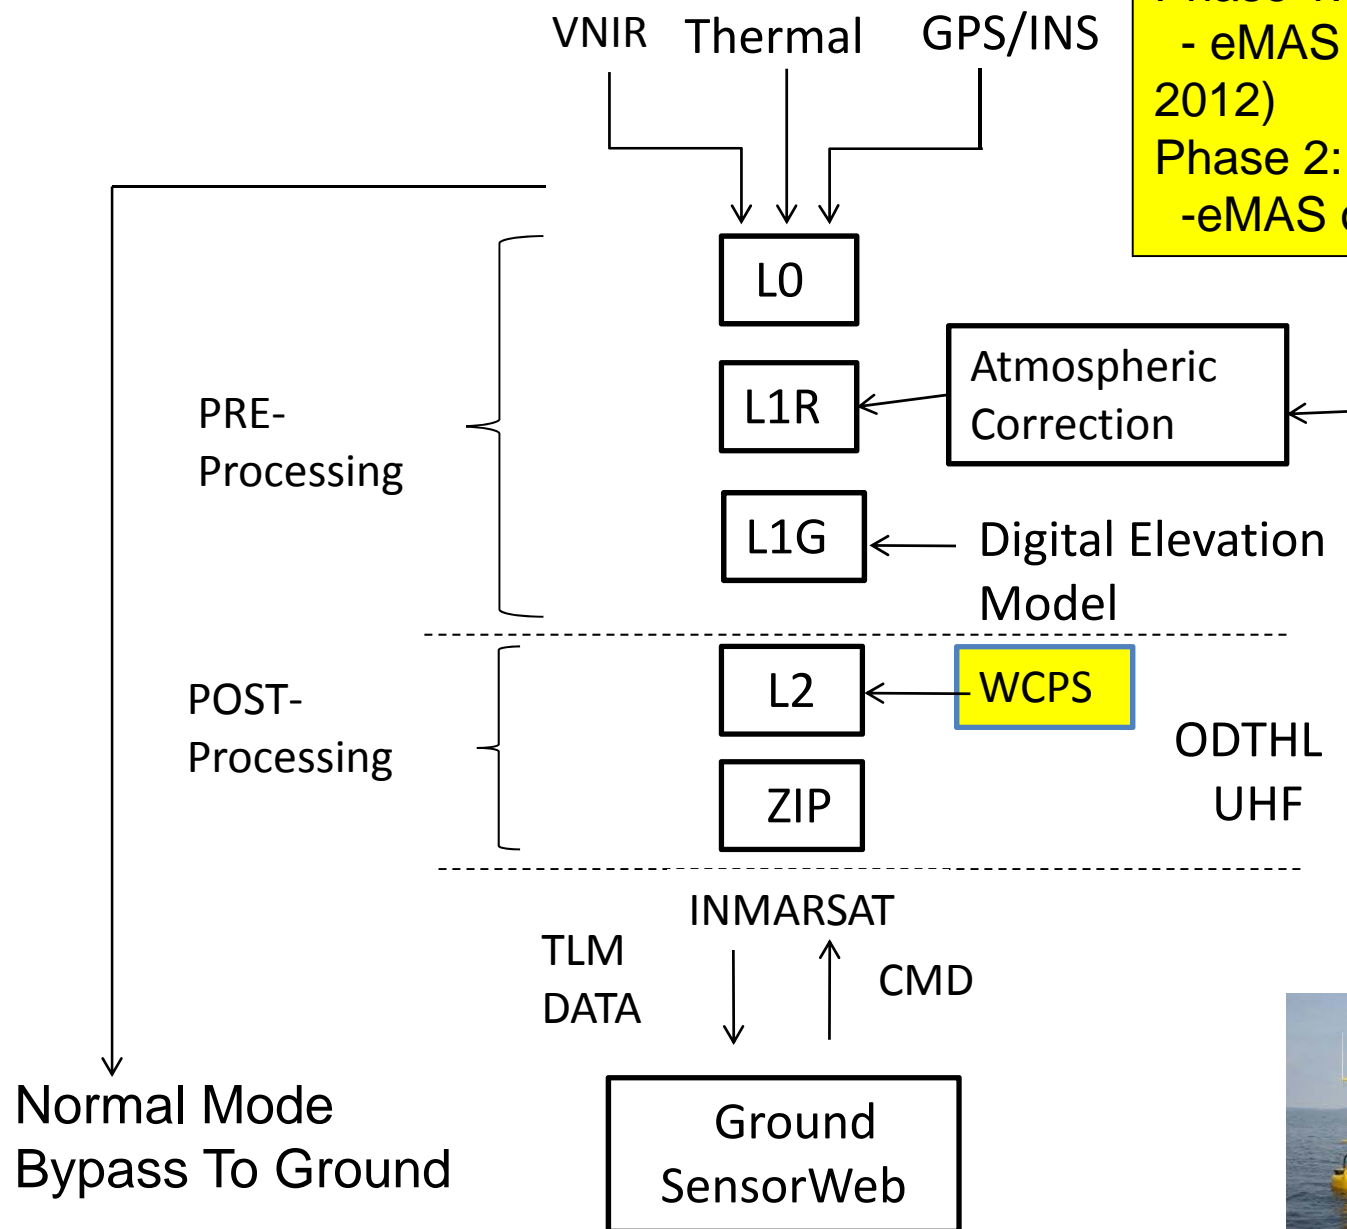


GlobalHawk



ER-2


Details of First Use of Cloud with WCPS




- First experiments using WCPS with Cloud occurred in collaboration with Open Cloud Consortium which provided a Cloud rack of equipment and personnel for system administration, funded by National Science Foundation
 - Next slide shows connectivity of cloud
- Cloud integrated into Earth Observing 1 operations and WCPS used for ground data products
- User interface, along with WCPS-C and WCPS-R are all hosted on cloud
 - For other missions each of these components can reside in different places.




Open Science
Data Cloud

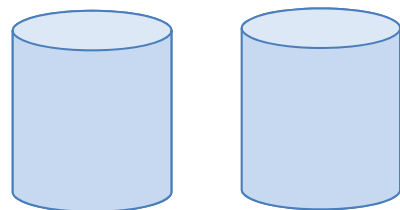

Biological data
(Bionimbus)

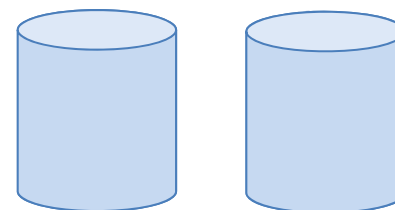


Astronomical data

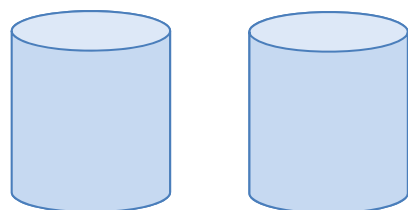

Earth science data (& disaster relief)





UIC

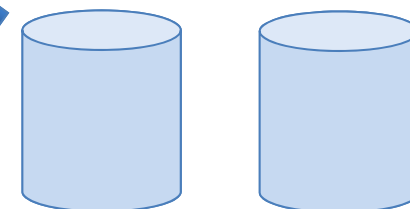

NSF-PIRE OSDC Data Challenge



Cloud Integration on EO-1 - Overview

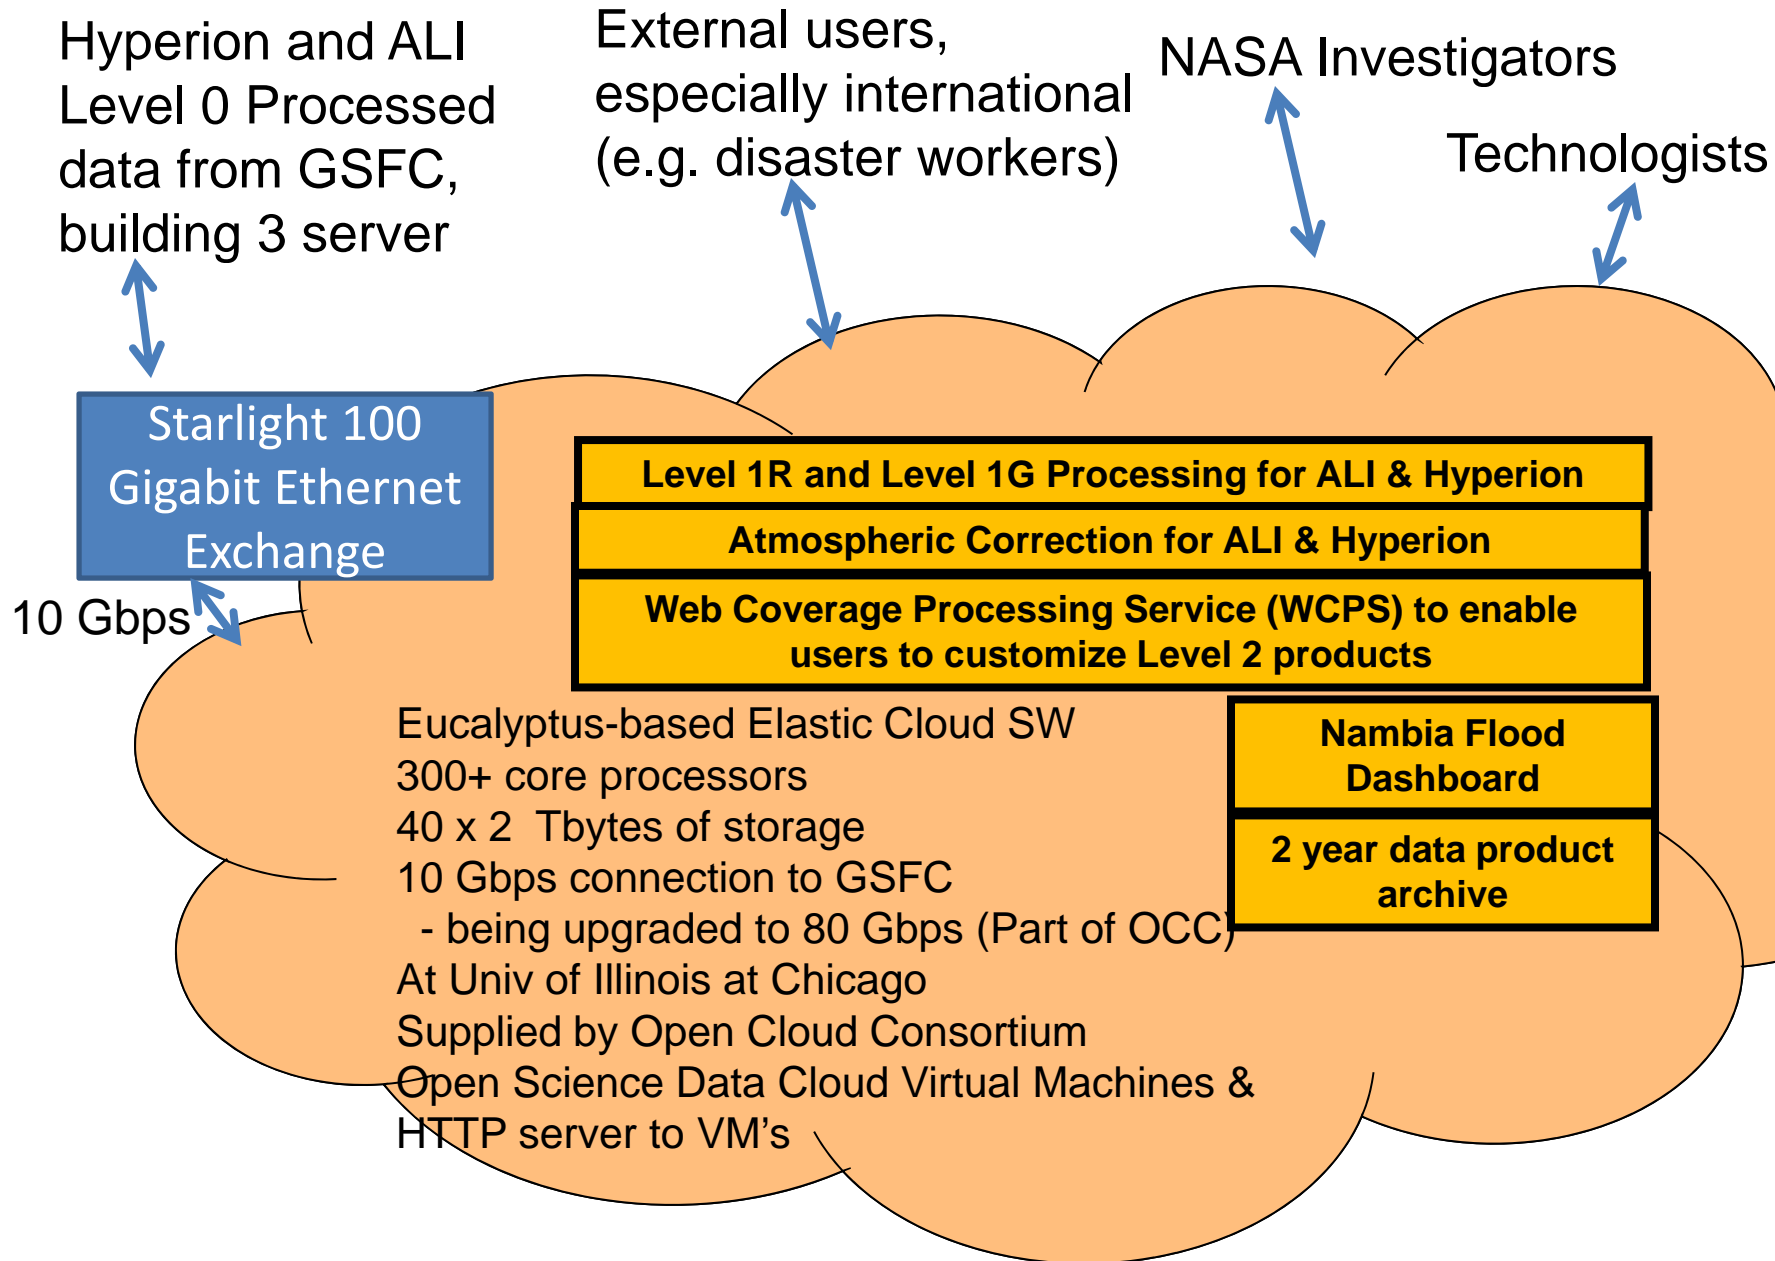

OCC = Open Cloud Consortium



Transformation to On-Demand Product Cloud Part 1


EO-1 Data Product Pipeline

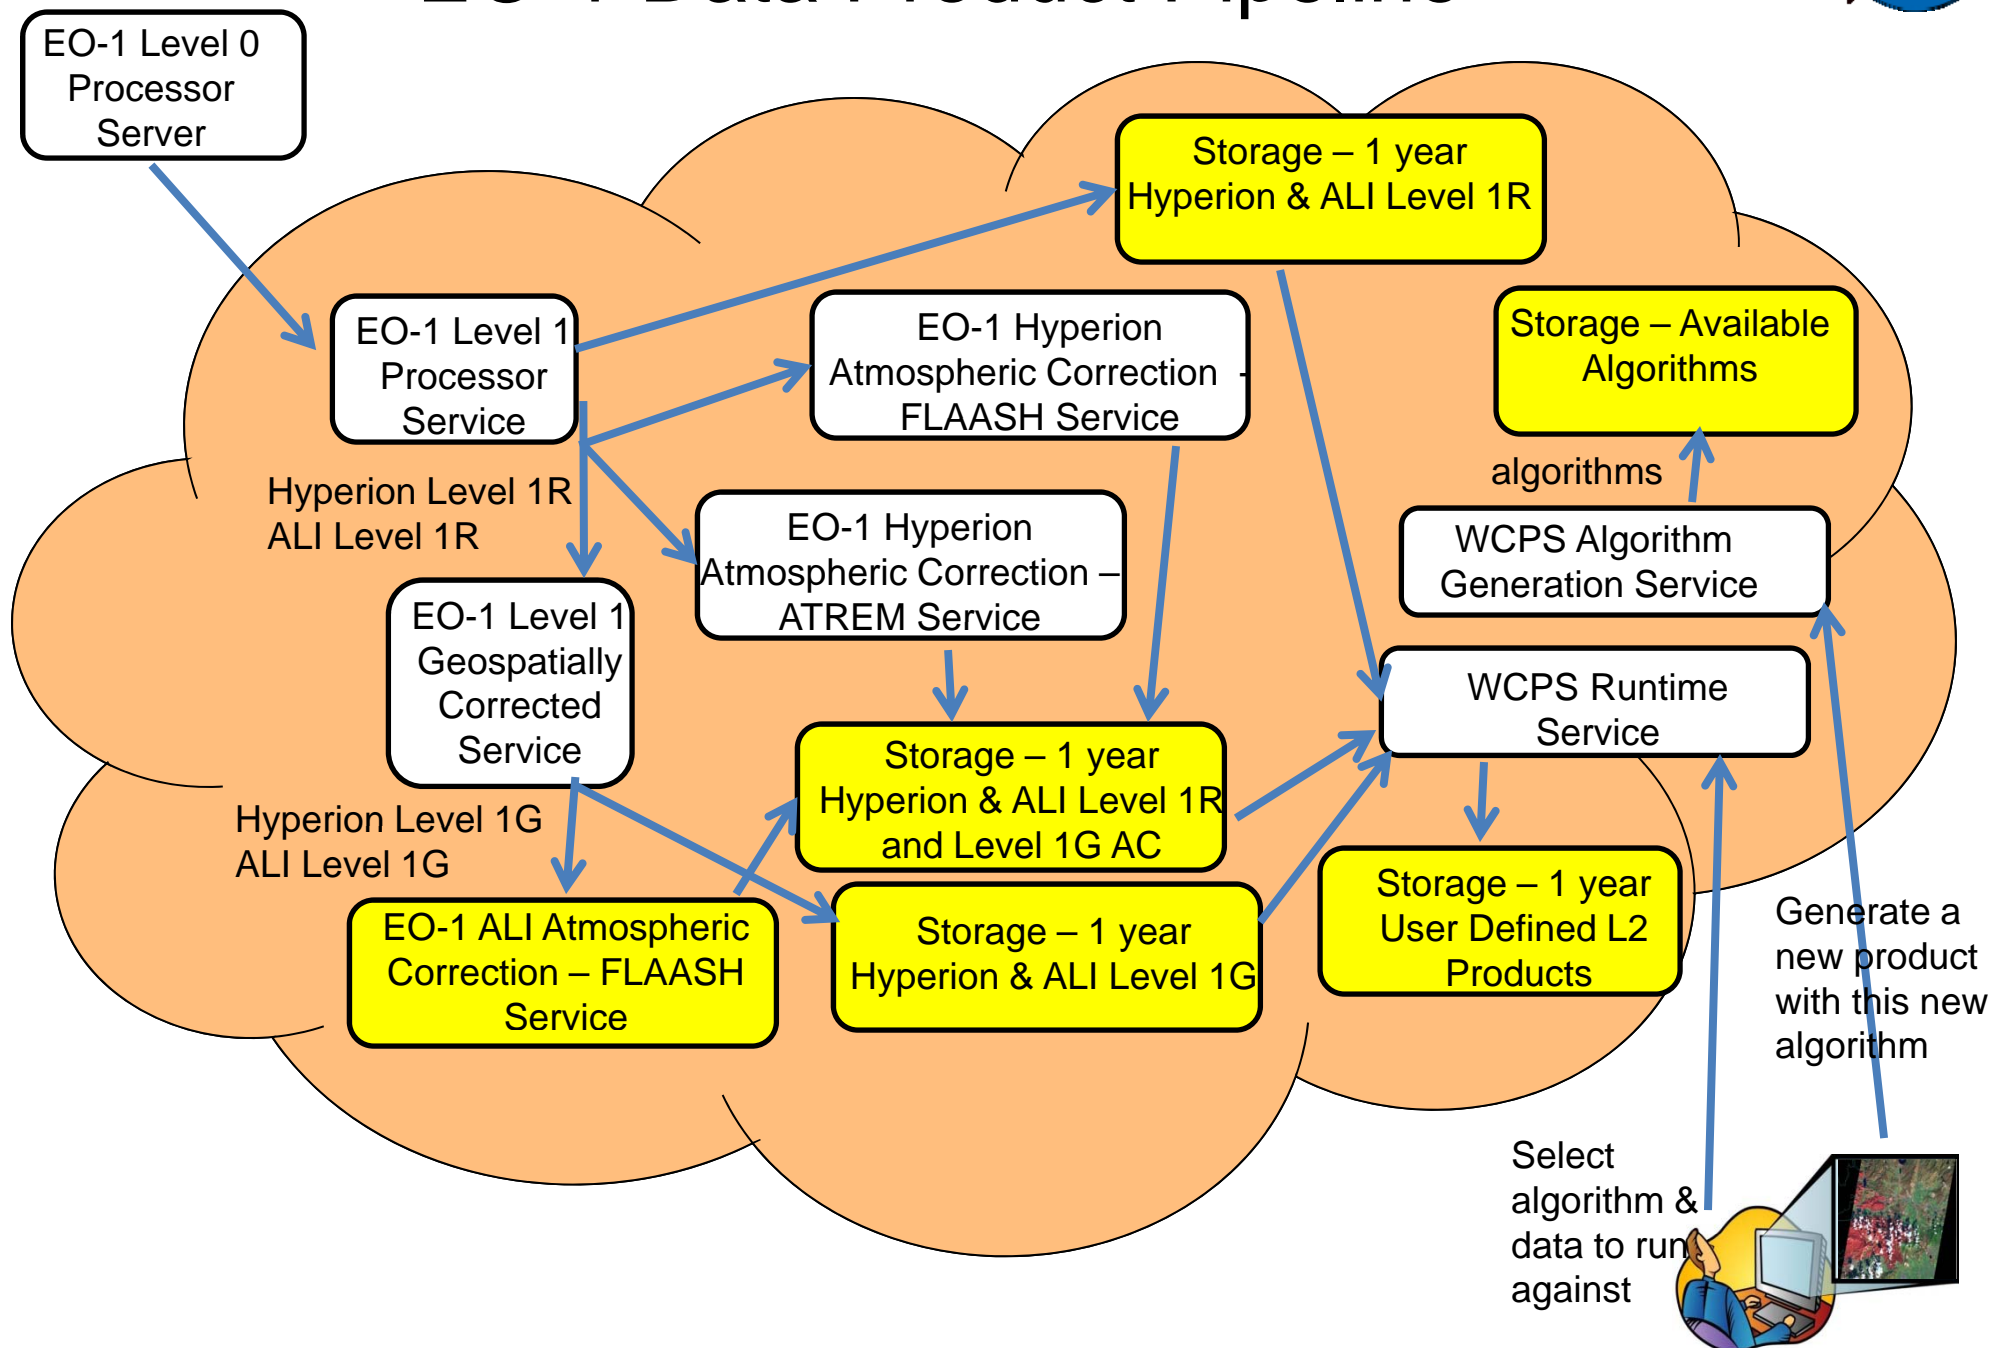

On-Demand Product Cloud Part 2

Flood Dashboard (Matsu)

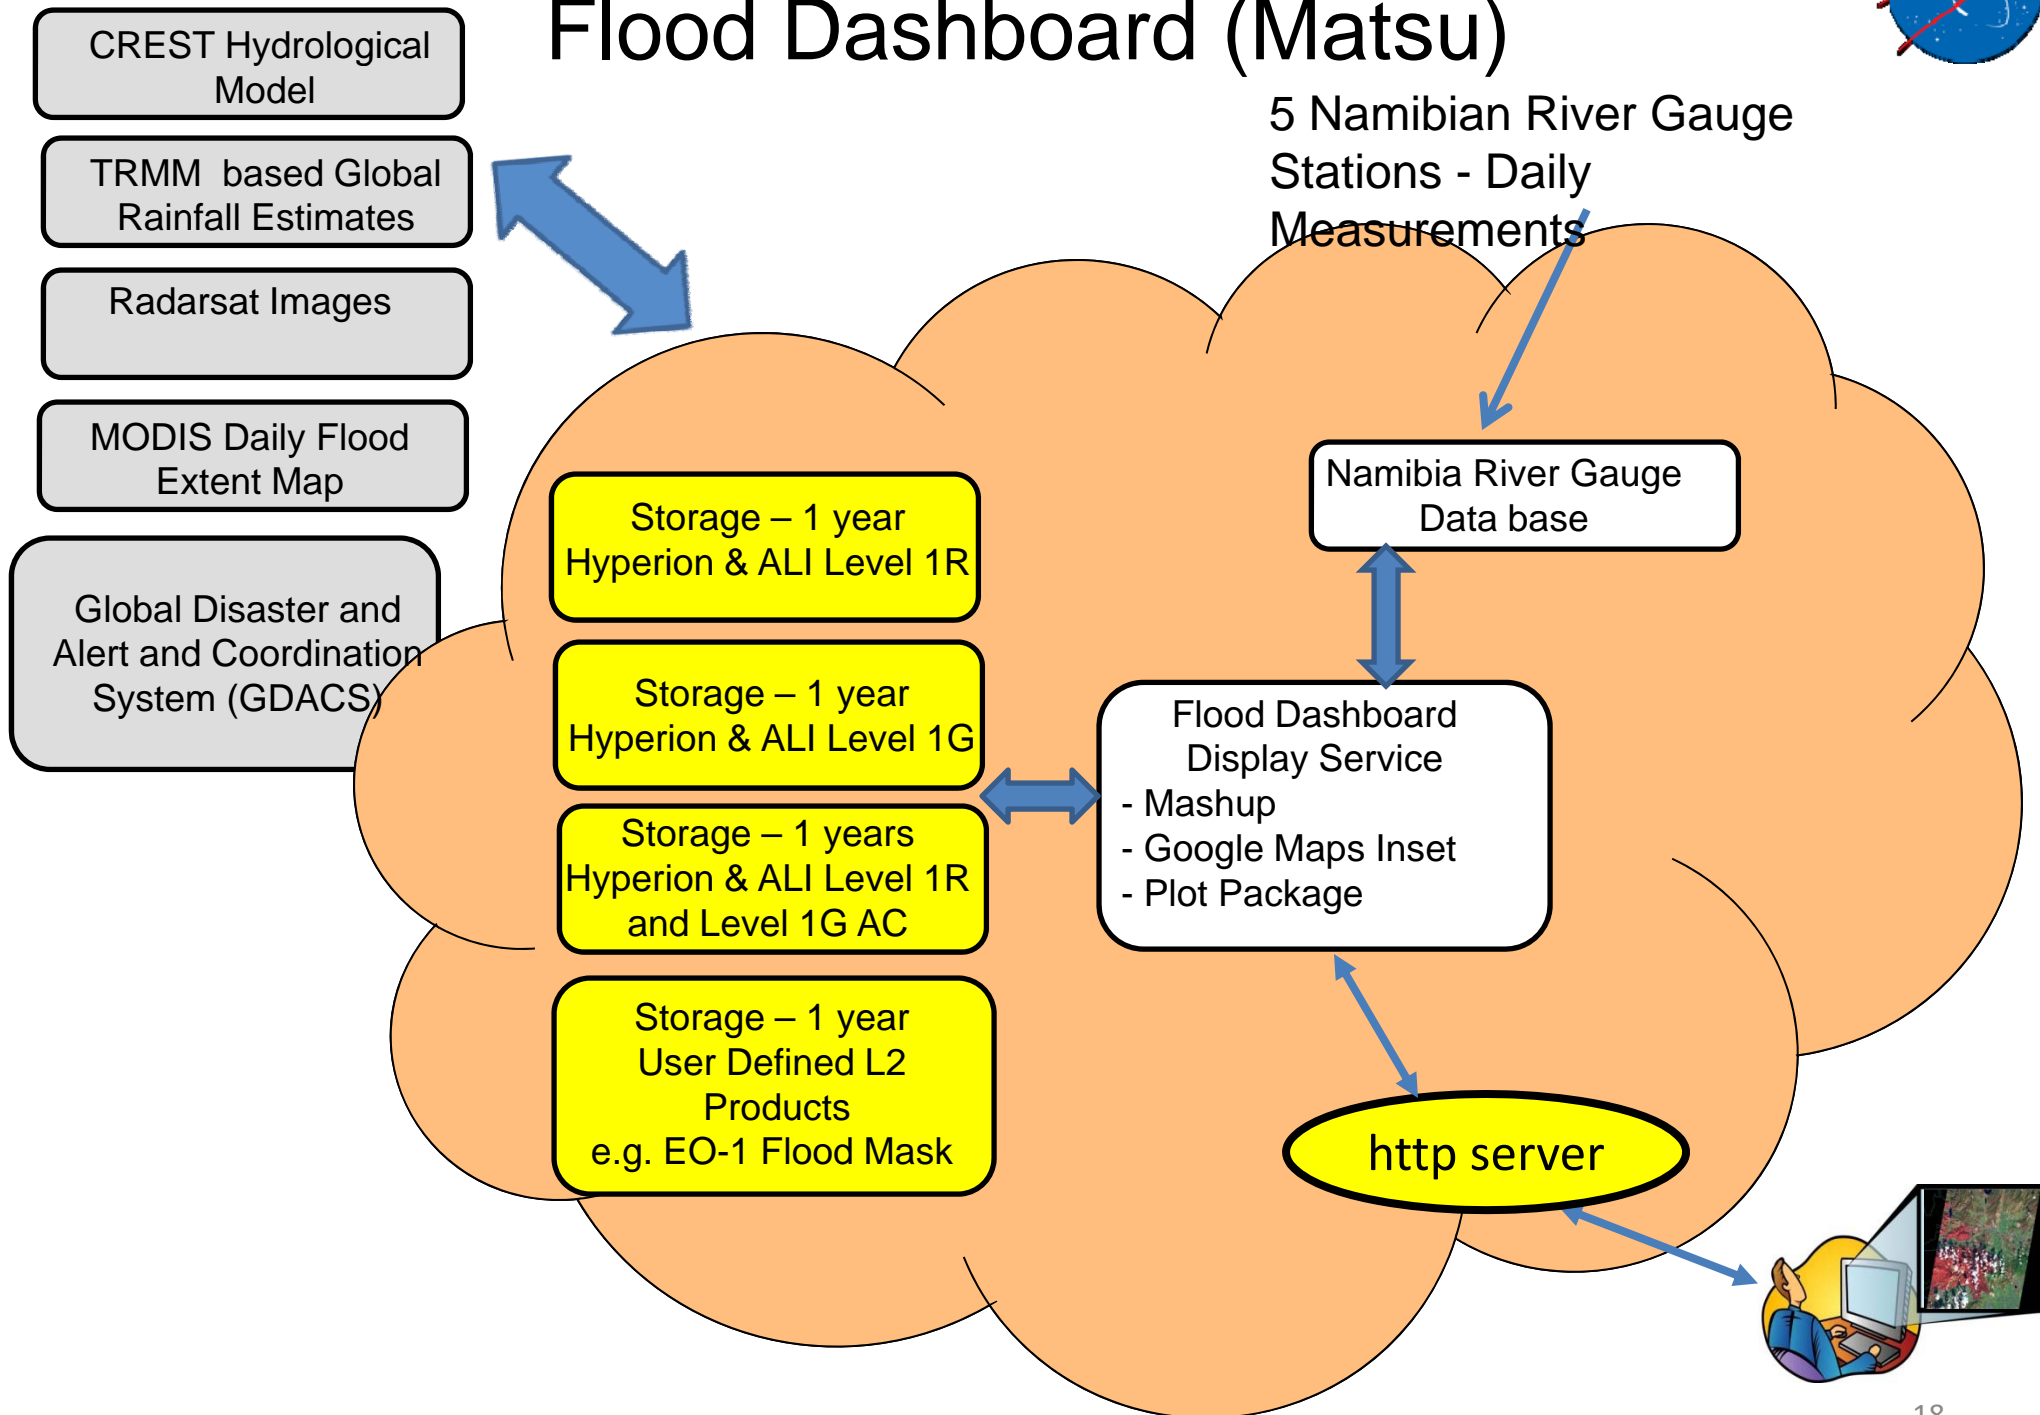



Conclusion

- WCPS provide a unique capability to control in near realtime the method by which raw sensor data is processed onboard or on the ground
- The WCPS software is flexible and can be set up in a variety of ways
 - Distributed or centralized
- Largest impact of WCPS will in airborne and satellite sensor based communities because it is a paradigm shift on how onboard algorithms get updated versus traditional methods
 - More flexibility
 - Faster
 - Less expensive